




CHCAXTE- CHICAGO APPROVED STEEL EXIT/STAIR SIGN



PROJECT: _____
FIXTURE TYPE: _____
LOCATION: _____
CONTACT/PHONE: _____



DIMENSIONS

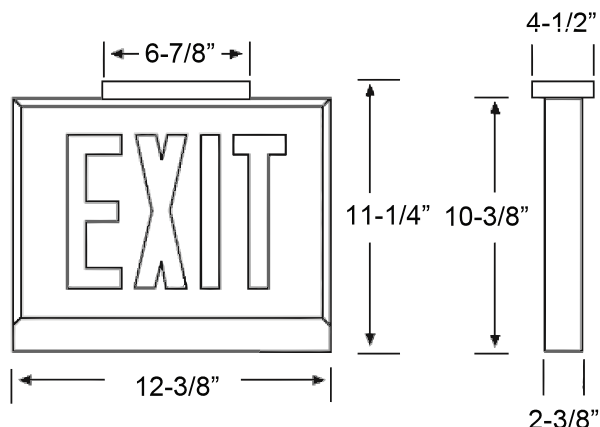

ILLUMINATION

- Ultra-bright, energy efficient, long-lasting white LEDs provide uniform illumination.

WARRANTY & LISTINGS

- Five year warranty on all electronics and housing. Battery prorated for five years.
- UL listed for damp locations (0° –50°C).
- Meets UL924, NFPA101 Life Safety Code, NEC, OSHA, Local and State Codes.
- Meets city of Chicago requirements.
- Certified to CEC under Title 20 Regulations.

MOUNTING

- Mounting canopy included for top or end mount.
- Universal knockout pattern on backplate for wall mount.

ELECTRICAL

- Dual 120V/277 voltage.
- Charge rate/power “ON” LED indicator light and push to test switch for mandated code compliance testing.
- 4.8V Long-life, maintenance-free, rechargeable NiCd battery (EM models only).
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 120-minute emergency illumination.
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

HOUSING

- Durable, powder-coated 20-gauge steel construction in white or black finish.
- Unique design allows double face conversion in the field.

ORDERING INFORMATION



EXAMPLE: CHCAXTEU1RWEM-NA

MODEL	NO. OF FACES	LETTER	HOUSING	BATTERY	SIGNAGE/DIRECTIONAL ARROWS
CHCAXTEU	1= Single Face 2= Universal Single/ Double Face	R= Red on White	W= White B= Black	(blank)= AC-Only EM= Battery Backup	-NA = Exit No Arrow -S-NA = Stair No Arrow -DA = Exit Double Arrow -S-DA = Stair Double Arrow -RA ¹ = Exit Right Arrow -S-RA ¹ = Stair Right Arrow -LA ¹ = Exit Left arrow -S-LA ¹ = Stair Left Arrow -LARA ² = Exit Left/Right Arrow -S-LARA ² = Stair Left/Right Arrow

¹ Available in single face configuration only. ² Available in double face configuration only.