

Project:	
Type:	
Catalog #:	



### Illumination

- Two, 12W adjustable b-pin halogen lamp heads.

### Electrical

- Dual 120V/277V.
- Charge rate/power "ON" LED indicator light and push to test switch for mandated code compliance testing.
- LVD (low voltage disconnect) prevents battery from deep discharge.
- 6V, 12Ah, sealed lead calcium, maintenance-free, rechargeable batteries – two per 50 watt unit and four per 100 watt unit.
- Internal solid-state transfer switch automatically connects the internal battery to lamp heads for minimum 120-minute emergency illumination.
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours.

### Mounting

- Side and top conduit knockouts.

### Housing

- Durable 20-gauge steel housing.
- Neutral white or black finish.

### Warranty


- Five year warranty on all electronics and housing. Batteries pro-rated for two years.

### Listing


- UL listed for damp locations (20°-50°C/68°F-122°F standard).
- Meets UL924, NFPA101 Life Safety Code, NEC, OSHA, Local and State Codes.
- Meets city of Chicago requirements.

### Dimensions

50 Watt Capacity

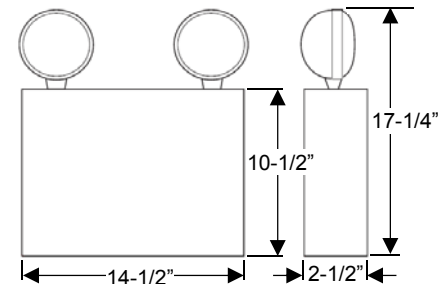

100 Watt Capacity

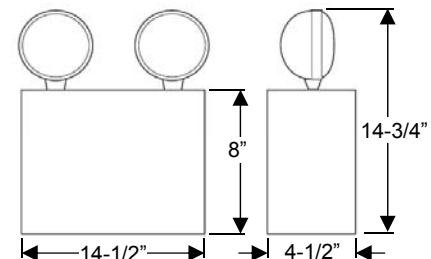

### Electrical information

	Supply Voltage	Input Watts	Max. Amps
CHCADXR650	120/277	18W	0.17A/0.07A
CHCADXR1250	120/277	26W	0.25A/0.10A
CHCADXR6100	120/277	23W	0.21A/0.10A
CHCADXR12100	120/277	32W	0.30A/0.13A

### Ordering information

Model	Voltage	Watts (for 90 minutes)	Housing Color
CHCADXR	6 6V	50 50W	Blank White
	12 12V	100 100W	B Black