



CHCADXR- INCANDESCENT CHICAGO APPROVED STEEL EMERGENCY UNIT



PROJECT: _____
FIXTURE TYPE: _____
LOCATION: _____
CONTACT/PHONE: _____



CHCADXR 27 WATT

CHCADXR 100 WATT

CHCADXR 50 WATT

ILLUMINATION

- Two, 6V/12V 12.0 watt adjustable bi-pin halogen lamp heads.
- Long lasting, efficient, wedge base incandescent or bi-pin halogen lamps.
- High performance chrome-plated metallized reflector and glass lens for optimal light distribution.
- Adjustable 6V or 12V lamp heads provide optimal center-to-center spacing.

WARRANTY & LISTINGS

- Five year warranty on all electronics and housing. Battery prorated for two years.
- UL Listed for damp locations (20°C –50°C standard).
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- Meets city of Chicago requirements.

MOUNTING

- Universal knockout pattern on back for wall mount.
- Side and top knockouts for conduit feed applications.

ORDERING INFORMATION




EXAMPLE: CHCADXR27

MODEL	VOLTAGE	WATTS (FOR 90 MINS)	HOUSING COLOR
CHCADXR	(blank) ¹ = 6V 6= 6V ² 12= 12V ²	27=27 5=50 10=100	(blank)= White B= Black

¹ Available in 27 watt only.

² Available only in 50 watt & 100 watt models.

DIMENSIONS

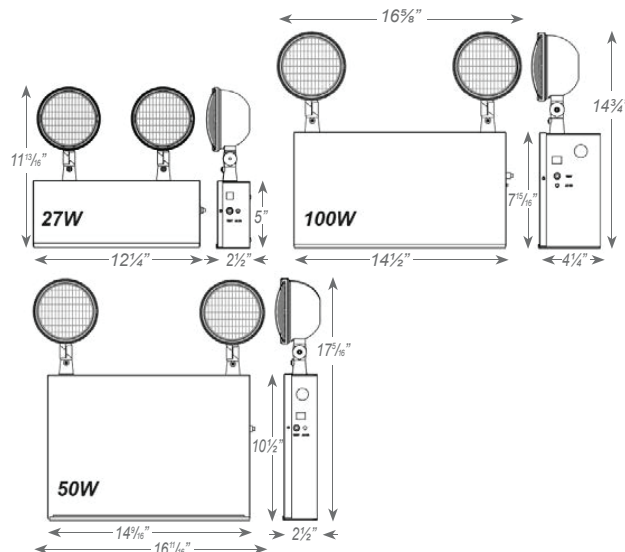

ELECTRICAL

- Dual 120V/277 voltage.
- Charge rate/power “ON” LED indicator light and push-to-test switch for mandated code compliance testing.
- LVD (low voltage disconnect) prevents battery from deep discharge.
- 6V Sealed lead acid, maintenance-free, rechargeable battery.
- Internal solid-state transfer switch automatically connects the internal battery to lamp heads for minimum 120-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.
- Remote capacity of 26W and 76W available on 50W and 100W models respectively.

HOUSING

- Durable 20-gauge steel construction in white or black finish.