



CHCALEDXTEU- CHICAGO APPROVED ALL LED EXIT/STAIR SIGN & EMERGENCY STEEL COMBO



PROJECT: _____
FIXTURE TYPE: _____
LOCATION: _____
CONTACT/PHONE: _____



ILLUMINATION

- Long lasting, energy efficient white LED EXIT or STAIR sign illumination
- Two 6V 5.3W adjustable Chicago approved white LED lamp heads.


WARRANTY & LISTINGS

- Five year warranty on all electronics and housing. Battery prorated for five years.
- UL listed for damp locations (20°C –50°C).
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- Meets city of Chicago sign requirements.

OPTIONS

- RC: Remote capacity of up to 10.0 watts.

DIMENSIONS

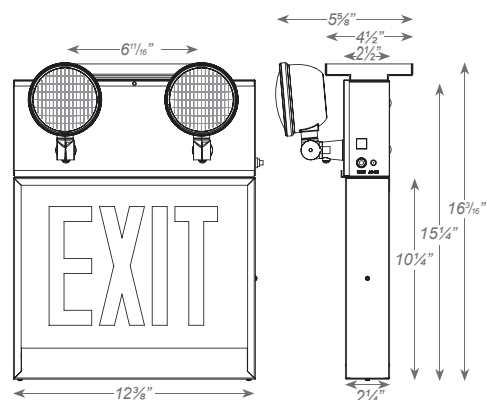

ELECTRICAL

- Dual 120/277V standard.
- Charge rate/power “ON” LED indicator light and push-to-test switch for mandated code compliance testing.
- 6V sealed lead acid, maintenance-free, rechargeable battery.
- LVD (low voltage disconnect) prevents battery from deep discharge.
- Internal solid-state transfer switch automatically connects the internal battery to LED board and LED lamp heads for minimum 120 minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

HOUSING

- Single or double face configurations.
- Durable, powder-coated 20-gauge steel construction in white or black finish.

MOUNTING

- Mounting canopy included for top or end mount.
- Universal knockout pattern on back plate for wall mount.

ORDERING INFORMATION



EXAMPLE: CHCALEDXTEU1RW-NA

MODEL	NO. OF FACES	LETTER	HOUSING	OPTIONS	SIGNAGE/DIRECTIONAL ARROWS	
CHCALEDXTEU	1= Single Face 2= Universal Single/ Double Face	R= Red on White	W= White B= Black	RC= Remote Capacity	-NA = Exit No Arrow -DA = Exit Double Arrow -RA ¹ = Exit Right Arrow -LA ¹ = Exit Left Arrow -LARA ² = Exit Left/Right Arrow	-S--LA ¹ = Stairs Left Arrow -S--NA = Stairs No Arrow -S--DA = Stairs Double Arrow -S--RA = Stairs Right Arrow -S--LARA ² = Stairs Left/Right Arrow

¹ Available in single face configuration only. ² Available in double face configuration only.