




## LEDCHCADXR - LED CHICAGO APPROVED STEEL EMERGENCY UNIT



PROJECT: \_\_\_\_\_  
FIXTURE TYPE: \_\_\_\_\_  
LOCATION: \_\_\_\_\_  
CONTACT/PHONE: \_\_\_\_\_



### DIMENSIONS

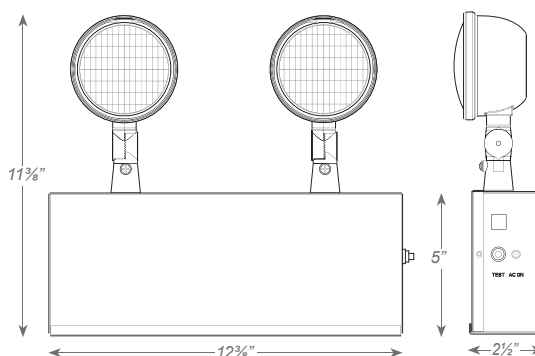

### ILLUMINATION

- Two, 6V, 5.3 watt adjustable white LED lamp heads.
- High performance chrome-plated metallized reflector and glass lens for optimal light distribution.
- Adjustable 6V or 12V lamp heads provide optimal center-to-center spacing.

### WARRANTY & LISTINGS

- Five year warranty on all electronics and housing. Battery prorated for two years.
- UL Listed for damp locations (20°C – 50°C).
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- Meets City of Chicago requirements.

### HOUSING

- Durable 20-gauge steel construction in white or black finish.

### ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power “ON” LED indicator light and push-to-test switch for mandated code compliance testing.
- LVD (low voltage disconnect) prevents battery from deep discharge.
- 6V sealed lead acid, maintenance-free, rechargeable battery.
- Internal solid-state transfer switch automatically connects the internal battery to the LED lamp heads for minimum V120-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.
- Remote capacity of 10.0 watts standard on 20.0 watt models.

### MOUNTING

- Universal knockout pattern on back plate for wall mount.
- Side and top knockouts for conduit feed applications.

### ORDERING INFORMATION



EXAMPLE: LEDCHCADXR-10

MODEL	WATTAGE	HOUSING COLOR
LEDCHCADXR	10= 10 Watts 20= 20 Watts	(blank)= White B= Black