




## MR-LED Indoor High Performance Thermoplastic Remote Head



PROJECT: \_\_\_\_\_  
FIXTURE TYPE: \_\_\_\_\_  
LOCATION: \_\_\_\_\_  
CONTACT/PHONE: \_\_\_\_\_



### DIMENSIONS

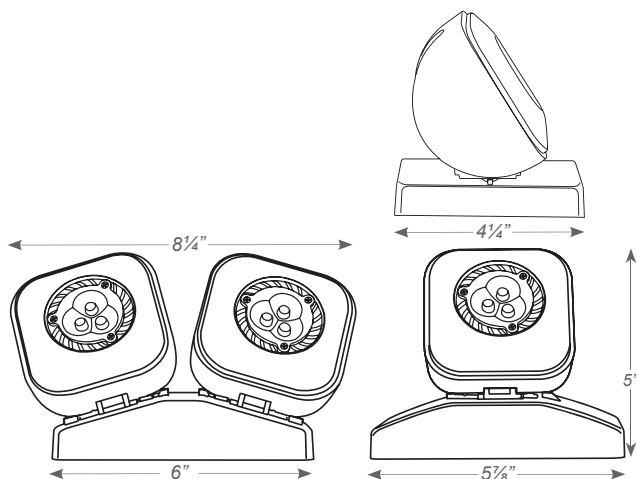

### FIXTURE COMPATIBILITY CHART

Reference individual unit equipment specification sheets for remote load capacity availability.

MULE LIGHTING MODEL TYPE			
LEDTFX-2	R-5HO*	TFX-2	EZXTE-RC*
LEDCADXR	R-16-HO*	NYDXR	CLPU-RC
RMR-16-65/125	DXR	CXTEU-RC*	CALEDCXTE
CADXR	LEDCXTEU-RC	LEDR5-HO	CAR
LEDSDXR	CWLEZXTE-RC	RMCLPU-RC	RMLEDCXTE

\* SDT versions of the fixtures are not compatible with the MR-LED heads

### ORDERING INFORMATION

Model	No. of Heads	Color	Voltage	Wattage <sup>1</sup>
MR-LED	1 = Single Head	(blank) = White	MV = For use with	(blank) = 3.3 Watts
	2 = Double Head	B = Black	3.6V, 6V, 9.6V, or 12V	HL = 5.0 Watts
DC Power Source				

<sup>1</sup> Wattage rating stated per head.

Ordering Example: MR-LED-1-MV

### ILLUMINATION

- Long lasting, efficient ultra bright white LED lamp heads.
- Adjustable lamp heads provides optimal center-to-center spacing.
- 3.3 watt (3 LEDs x 1.1 watt) per head.
- Optional high lumen heads are 5 watt (7 LEDs x 0.7 watt per head) and provide increased center to center spacing.

### ELECTRICAL

- Powered from low voltage power source with low voltage wiring (not provided).

### HOUSING

- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.

### MOUNTING

- Distance of maximum run is determined by system voltage, wire gauge and total maximum wattage on the run.
- Suitable for wall or ceiling mount.
- Universal mounting adapter included. Mounts to single-gang switch box.

### WARRANTY/LISTING

- Five year warranty.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.