



## RMX - Compact Thermoplastic Exit Sign



PROJECT:


FIXTURE TYPE:

LOCATION:

CONTACT/PHONE:



### DIMENSIONS

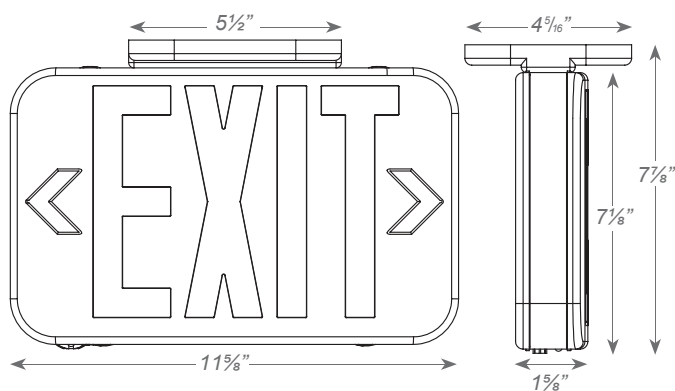

### ILLUMINATION

- Ultra bright, energy efficient, long life Red or Green LEDs.

### MOUNTING

- EZ-snap mounting canopy included for top or end mount.
- Universal knockout pattern on back plate for wall mount.

### ELECTRICAL


- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 1.2V Long life, maintenance-free, rechargeable NiCd battery (EM models only).
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

### HOUSING

- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.
- Aesthetically pleasing, curved face, rounded corner design.
- EZ snap-out Chevron directional indicators.

### WARRANTY/LISTING

- Five year warranty on all electronics and housing. Battery prorated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (0°C – 50°C).
- Certified to CEC under Title 20 Regulations.



### ORDERING INFORMATION

Model	No. of Faces	Letter Color	Housing Color	Battery
RMX	U = Universal Single/ Double Face	R = Red G = Green	W = White B = Black	(blank) = AC-Only EM = Battery Backup

NOTE: SALIDA face plate option available. Check with your Mule Lighting Representative.

EXAMPLE: RMX-U-R-W-EM