



R-16-HO-LED 4 HOUR EMERGENCY UNIT




PROJECT: _____
FIXTURE TYPE: _____
LOCATION: _____
CONTACT/PHONE: _____

UP TO 4 HOURS OF EMERGENCY RUN TIME



DIMENSIONS

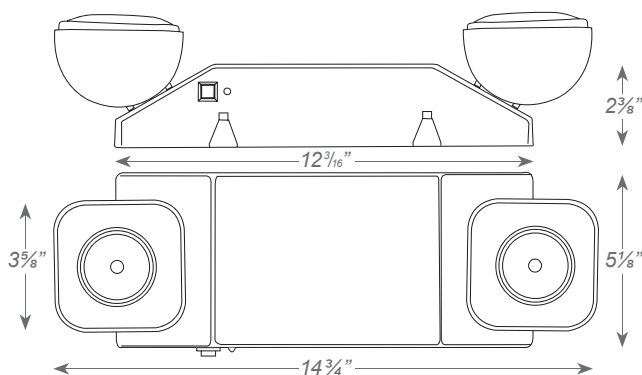

ILLUMINATION

- Two fully adjustable 3.3 watt, MR-16 LED lamp heads standard.
- High performance MR16 LED lamps with smooth metalized reflector and glass lens for optimal light distribution

MOUNTING

- Universal knockout pattern on back plate for wall mount. Snaps into place making internal electrical connections.
- Knockout for conduit applications.

ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- LVD (low voltage disconnect) prevents battery from deep discharge.
- 6V maintenance-free, rechargeable sealed lead acid battery.
- Offers 4 hour runtime when using standard 3.3 watt LED lamps and 2 hour runtime when using optional 5 watt LED lamps.
- Internal solid-state transfer switch automatically connects the internal battery to lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

HOUSING

- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.

OPTIONS

- USA: Substantial transformation assembly in the U.S. complies with "Assembled in the USA" under the Buy American Act.
- PLED: 5.0W high performance MR-16 base LED lamps for premium center-to-center spacing.

WARRANTY

- Five year warranty on all electronics and housing. Battery pro-rated for two years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (20°C – 40°C).

ORDERING INFORMATION

MODEL	HOUSING COLOR	OPTIONS
R-16-HO-LED	(blank) = White	USA = Assembled in USA
	B = Black	PLED = 5.0W High Lumen White LED Lamps

Ordering Example: R-16-HO-LED