

# PINNACLE SERIES







## The Pinnacle Series




PROJECT:

FIXTURE TYPE:

LOCATION:

CONTACT/PHONE:

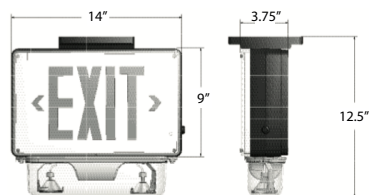

### PRODUCT DESCRIPTION

The WLPCL-C has a 120/277/347vac input. The maintenance free, sealed nickel cadmium batteries provide a minimum 90 minutes of emergency operation. The WLPCL-C has a 120/277/347VAC input. The maintenance free, sealed nickel cadmium batteries provide a minimum 90 minutes of emergency duration.




### ORDERING INFORMATION

Model	Operation	Capacity	LED	Face #	Mounting	Lamps	Housing Color	Options
WLPCL-C	6 (volt DC)	42W	LR (Red)	1 (Single)	W (Wall)	See lamp selection	BB = Black	PK (Pendant Kit)
	12 (volt DC)		LG (Green)		C (Ceiling)		WW = White	
					U (Universal)			

\*Note: On end mount configurations, contact factory.

Ordering Example: WLPCL-C-12-42W-LR-1-W-LED7W-B



### PRODUCT DESCRIPTION


The WLPCL-BU unit is constructed from .420" thick, heavy duty cast aluminum. Stainless steel, tamper resistant screws are standard and ensure the integrity of the battery unit. The WLPCL-BU comes standard in either black or white powder coat. The WLPCL-BU comes standard with an external LED status indicator and test switch.



### ORDERING INFORMATION

Model	Volts	Watts	Mounting	Lamps	Housing Color	Options
WLPCL-BU	6 (6V)	42 (6V, 12V)	U (Universal)	MR16-5W (6V)	BB = Black	PK (Pendant Kit)
	12 (12V)	90 (12V)		MR16-10W (6V, 12V)	WW = White	
				MR16-20W (12V)		
				MR16-35W (12V)		
				LED-5W (12V)		
				LED-7W (12V)		

Ordering Example: WLPCL-BU-12-42-U-LED-5W-BB



### PRODUCT DESCRIPTION

The WLCX wet location, vandal resistant, LED exit sign combines an appealing design, the latest in die casting technology and high performance electronics to ensure reliability. Designed to stand up in high abuse areas such as parking garages, correctional facilities, schools, and apartment complexes.



### ORDERING INFORMATION

Model	Faces	Letter	Housing	Mounting	Options
WLCX = AC Only	1 = Single	R = Red	B = Black	U <sup>1</sup> = Universal	SD <sup>2</sup> = Self-Diagnostics
WLPXC = Battery Back-up	2 = Double	G = Green	W = White	Surface Mount	DLC <sup>3</sup> = Dual Circuit Input
	U = Universal				SL = Special Lettering
					FL <sup>5</sup> = Flasher
					BZ <sup>5</sup> = Buzzer
					IH <sup>5</sup> = Internal heater
					ERT = 120 Minute Run Time
					IRT = Infrared Testing

Note: <sup>1</sup> Includes canopy for ceiling, wall & end mounting

<sup>2</sup> Standard on all battery models. Not available on AC units

<sup>3</sup> AC only, use with inverter or generator applications only

<sup>5</sup> Available on Battery models only

Ordering Example: WLPXC-1-R-B-SD-IH