



INDWLEZU - NEMA4X/NSF EXIT SIGN



PROJECT: _____
 FIXTURE TYPE: _____
 LOCATION: _____
 CONTACT/PHONE: _____



FEATURES

- NEMA 4X Certified
- NSF Certified
- California Energy Commission (CEC) compliant
- IP66 Rated
- Touchless, magnetically operated test switch (non-AC models only)
- Easy snap-out, field-selectable chevrons

SPECIFICATIONS

Illumination
 Long-life, high-intensity, green or red LEDs

Housing
 NEMA 4X rated polycarbonate enclosure, polycarbonate lens and stainless steel hardware

Electrical Input
 120/277VAC Dual primary, 60Hz

Battery
 Maintenance-free NiCad battery

Operating Temp
 -20°C to 50°C (-4°F to 122°F)

Run Time
 90 Minute emergency run time, 24 hour recharge time

Legend
 Fully illuminated 6" characters with 3/4" stroke


Mounting
 Back, end or top mount

Finishes
 Black or White

Certifications
 UL 924 Listed for Wet Locations Meets NFPA 101 Life Safety Code, NEC, OSHA UL Certified for use in food service operations California Energy Commission (CEC) Title 20 Compliant NEMA 4X and IP66 Rated

Warranty
 Any component that fails due to a manufacturing defect is guaranteed for five years with a separate five year prorated warranty on the battery. The warranty does not cover physical damage, abuse or instances of uncontrollable natural forces. See the full Mule warranty document for detailed information.

DIMENSIONS

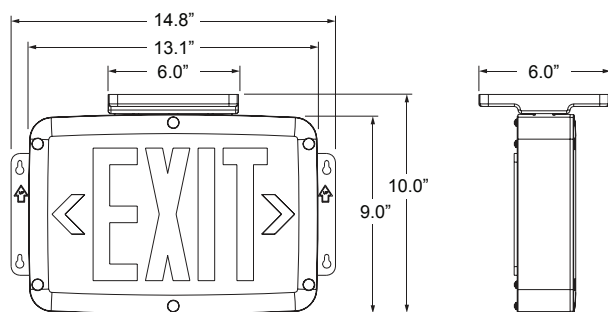

PRODUCT DESCRIPTION

The INDWLEZU Series is a part of the family of NEMA 4X and NSF certified emergency lighting solutions for extreme commercial and heavy industrial environments. The IND family offers protection against humidity, dust, and water infiltration and is comprised of the INDWLEZU (Exit Sign), INDCWLEZU (Exit Combo), INDEMR16 (Emergency Lighting Unit), and INDRHLED16 (Remote Head). The reinforced polycarbonate enclosure with impact-resistant, UV-stable polycarbonate lens is suitable for vandal-prone areas and Wet Locations.

ORDERING INFORMATION

Model	No. of Faces	Letter Color	Housing Color	Battery	Options (Factory Installed)
INDWLEZU	1 = Single 2 = Double	R = Red G = Green	W = White B = Black	(blank) = AC-Only EM = NiCd Battery	SDT = Self-Diagnostics ¹ 2C-120 = Dual Circuit With 120V Input ² 2C-277 = Dual Circuit With 277V Input ² TP = Tamper-Proof

¹ Available only with EM units. ² Available only with AC units.

Example: INDWLEZU1RBEM-SDT





INDWLEZU - NEMA4X/NSF EXIT SIGN



PROJECT: _____
FIXTURE TYPE: _____
LOCATION: _____
CONTACT/PHONE: _____

CONSTRUCTION

The INDWLEZU Series exit enclosure is made of UV-stable, reinforced polycarbonate coupled with a polycarbonate lens, corrosion-resistant hardware, and a molded gasket to provide protection for the equipment inside against ingress of solid foreign objects (dust) and water. Stencil letters are 6" high with 3/4" stroke.

ILLUMINATION

Illumination of the INDWLEZU Series is achieved with high-output, long-lasting red or green LEDs exceeding UL 924 requirements for brightness and uniformity. An exclusive color matched diffuser eliminates hot spots and striations, providing optimal light output.

ELECTRICAL

Input

Dual-voltage input 120/277VAC @ 60Hz.

Battery/Charger/Indicator (WB option only)

Maintenance-free 4.8 volt long-life, rechargeable nickel-cadmium batteries. Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery within 24 hours. The internal solid-state transfer switch automatically connects the internal battery to power the LED board for a minimum of 90 minutes of illumination during the loss of utility power. A bi-color LED indicator light alerts occupant on battery condition (Green-normal, Red-check battery).

Test Button

The INDWLEZU uses a touchless, magnetic test switch (non-AC models only) along with an LED light indicator for code compliance testing.

INSTALLATION

The INDWLEZU Series is supplied with a universal knockout pattern and gasket for watertight back mounting. The unit also comes with a polycarbonate canopy for ceiling or end mounting.

OPTIONS

Two-Circuit Operation (Option: 2C-120 or 2C-277)

Two-circuit operation features for emergency lighting allows the dual input of power sources for AC-only units (LB). The purpose of this feature is to provide the compatibility of our emergency units in applications where inverters or alternate backup power sources are utilized.

Tamper-Proof Hardware (Option: TP)

Tamper-resistant hardware adds an additional layer of protection to the unit, preventing unwanted access to the interior of the unit or removal of the lens.

Guardian Self-Test/Self-Diagnostics (Option: SDT)

The Guardian circuit continuously monitors the operating condition of the AC power, battery supply voltage, emergency lamp continuity and charging circuit. The purpose of this option is to provide visual signaling in response to a fault at the EXIT sign battery and/or battery charger. If a failure is detected, visual status will occur immediately via the CHARGER LED and/or the BATTERY FAULT LED. The LED will stay illuminated until the fault is corrected. The Guardian circuit also monitors the transfer circuit as well as performing automatic code-compliant testing. The Guardian circuit will perform a 30 second discharge and self-test every 30 days. A 60 minute discharge and self-test is performed every 6 months, and a 90 minute discharge and self-test is performed every 12 months.

Red LED	Unit Fault	Corrective Action
Steady	Battery Disconnected	Check Battery Connection
1 Blink	Electronics Failure	Check Battery Then Consult Factory
2 Blinks	Battery Failure	Check Battery Then Consult Factory
3 Blinks	N/A	N/A
4 Blinks	Emergency Lamp	Check Lamp Connections Then Consult Factory
5 Blinks	Remote Lamp	Check Remote Lamp Connections Then Consult Factory

NEMA 4X Rated (Standard)

NEMA 4X rated fixtures are designed for outdoor applications. NEMA 4X rating ensures that the fixtures will withstand contact with falling dirt, moderate or jet-driven water, ice and corrosion. NEMA 4X fixtures are designed to perform in Hose-Down applications.

IP66 Rated (Standard)

IP66 rating ensures that the product can be installed in outdoor applications where significant water or dust may come in contact with the fixture. IP66 rated fixtures are fixtures designed to perform in Hose-Down applications.

NSF Certified (Standard)

NSF certification ensures that the equipment has been evaluated, tested, and certified by NSF International as meeting international commercial food equipment standards and that the product can be installed in food processing applications.

CONFORMANCE TO CODES & STANDARDS

The INDWLEZU Series is UL 924 Listed for Wet Locations and meets or exceeds the following: NEC requirements and NFPA 101.