



# Ever Brite® 7000 Series PF50 Exit Signs



PROJECT: \_\_\_\_\_  
 FIXTURE TYPE: \_\_\_\_\_  
 LOCATION: \_\_\_\_\_  
 CONTACT/PHONE: \_\_\_\_\_




Flag Mount Option



Ceiling Mount Option

## DIMENSIONS

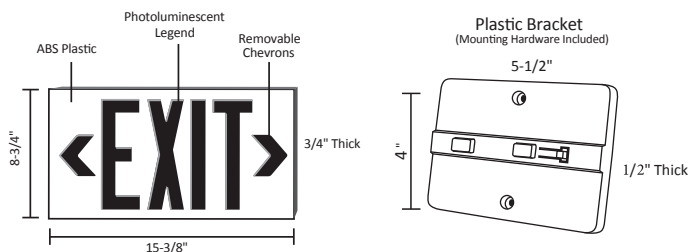

## TESTS PASSED

UL 924 Emergency Lighting and Power Equipment Listed through UL; Meets NFPA Life Safety Code 101 and OSHA requirements; International Building and Fire Code 2009, 2012, 2015, 2018 Listed for LED lighting.

## INSTALLATION

Surface, flag or ceiling mounted (hardware included). Before installation it must be determined that there is a minimum of 5 Fc of LED, fluorescent, metal halide or mercury vapor light on the face(s) of the sign at all times during building occupancy. (Conduit bracket sold separately.)

## ORDERING INFORMATION

Catalog #	Frame Color	No. of Faces	Mounting Bracket
70	4 = Green	0 = Single Sided	B = Bracket
	5 = Red	2 = Double Sided	PF50-CDT-B = Conduit Bracket
	6 = Black		

EXAMPLE: 7062-B (Double sided Black with bracket)

Catalog #	Frame Color	Letter Outline	No. of Faces	Mounting Bracket
7	1 = White	2 = Green	0 = Single Sided	B = Bracket
		3 = Red	2 = Double Sided	PF50-CDT-B = Conduit Bracket

EXAMPLE: 7120-B (Single sided White with Green Outline with Bracket)

Other photoluminescent components of the Ever Brite® Safety Guidance System include: Ever Brite® Egress Pathway Strips, Ever Brite® Tape, Ever Brite® Dots and Arrows, Ever Brite® Stripe Tape, Ever Brite® Safety Track, and Ever Brite® Safety Signage.

## FEATURES

- Zero energy consumption - zero cost, green design
- Zero maintenance - no bulbs, no battery replacement
- Non-toxic, non-radioactive
- No disposal cost
- Designed for surface, flag, ceiling or conduit mounting
- Can be used for both high-level and low-level applications • Movable if egress paths change
- Thin, low profile construction
- Consistent, uniform illumination
- 50 feet rated, visibility, readability
- Recyclable
- LEED points qualified

## TECHNICAL INFORMATION

Sizes: 15-3/8" x 8-3/4" x 3/4"  
 Letter size: 7/8" stroke with 7" height  
 Background: Black, Red, Green, White  
 Illumination: High Visibility Green  
 Rated Viewing Distance: 50 feet  
 Directional: (2) Chevron arrows included for easy direction selection  
 Construction: ABS plastic with photoluminescent panel  
 Durability: Explosion-proof/Suitable for floor proximity installation

## APPLICATIONS

Both high-level and low-level  
 Suitable for floor proximity installation

## LIFE EXPECTANCY

25+ Years

## POWER REQUIREMENTS

NO additional electrical or mechanical source required

