



CHCAR - INCANDESCENT CHICAGO APPROVED RECESSED STEEL EMERGENCY UNIT



PROJECT: _____
FIXTURE TYPE: _____
LOCATION: _____
CONTACT/PHONE: _____




ILLUMINATION

- Two, 6V/12V 12.0 watt adjustable bi-pin halogen lamp heads.
- Long lasting, efficient, wedge base incandescent or bi-pin halogen lamps.
- Adjustable 6V or 12V lamp heads provide optimal center-to-center spacing.
- High performance chrome-plated metallized reflector and glass lens for optimal light distribution.

WARRANTY & LISTINGS

- Five year warranty on all electronics and housing. Battery prorated for five years.
- UL listed for damp locations (20°C –50°C).
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- Meets city of Chicago sign and plenum requirements.

DIMENSIONS

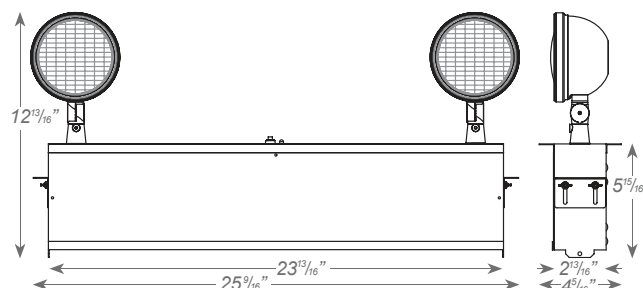

ELECTRICAL

- Dual 120V/277 voltage.
- Charge rate/power “ON” LED indicator light and push-to-test switch for mandated code compliance testing.
- LVD (low voltage disconnect) prevents battery from deep discharge.
- 6V sealed lead acid, maintenance-free, rechargeable battery.
- Internal solid-state transfer switch automatically connects the internal battery to lamp heads for minimum 120-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.
- Remote capacity of 26.0 watt standard on 50.0 watt models.

HOUSING

- Durable 20-gauge steel construction in white or black finish.

MOUNTING

- Designed for use with T-bar grid ceilings.
- Holes provided on enclosure for wire-suspension mount.

ORDERING INFORMATION



EXAMPLE: CHCAR-627

MODEL	VOLTAGE	WATTS (FOR 90 MINS)	HOUSING COLOR
CHCAR	6= 6V 12= 12V	27= 27 ¹ 50=50	(blank)= White B= Black

Available in 6V only.